

This is CS50

12345

{crypt}\$ I \$LIBcWwQn\$pxTB3yAjbVS/HTD2xuXF10

office hours

lowell, 9pm - midnight

99 bottles of beer on the wall,
99 bottles of beer,
Take one down, pass it around,
98 bottles of beer on the wall.

functions

return values

scope

local variables

scope
global variables




foo's locals

foo's parameters

main's locals


main's parameters

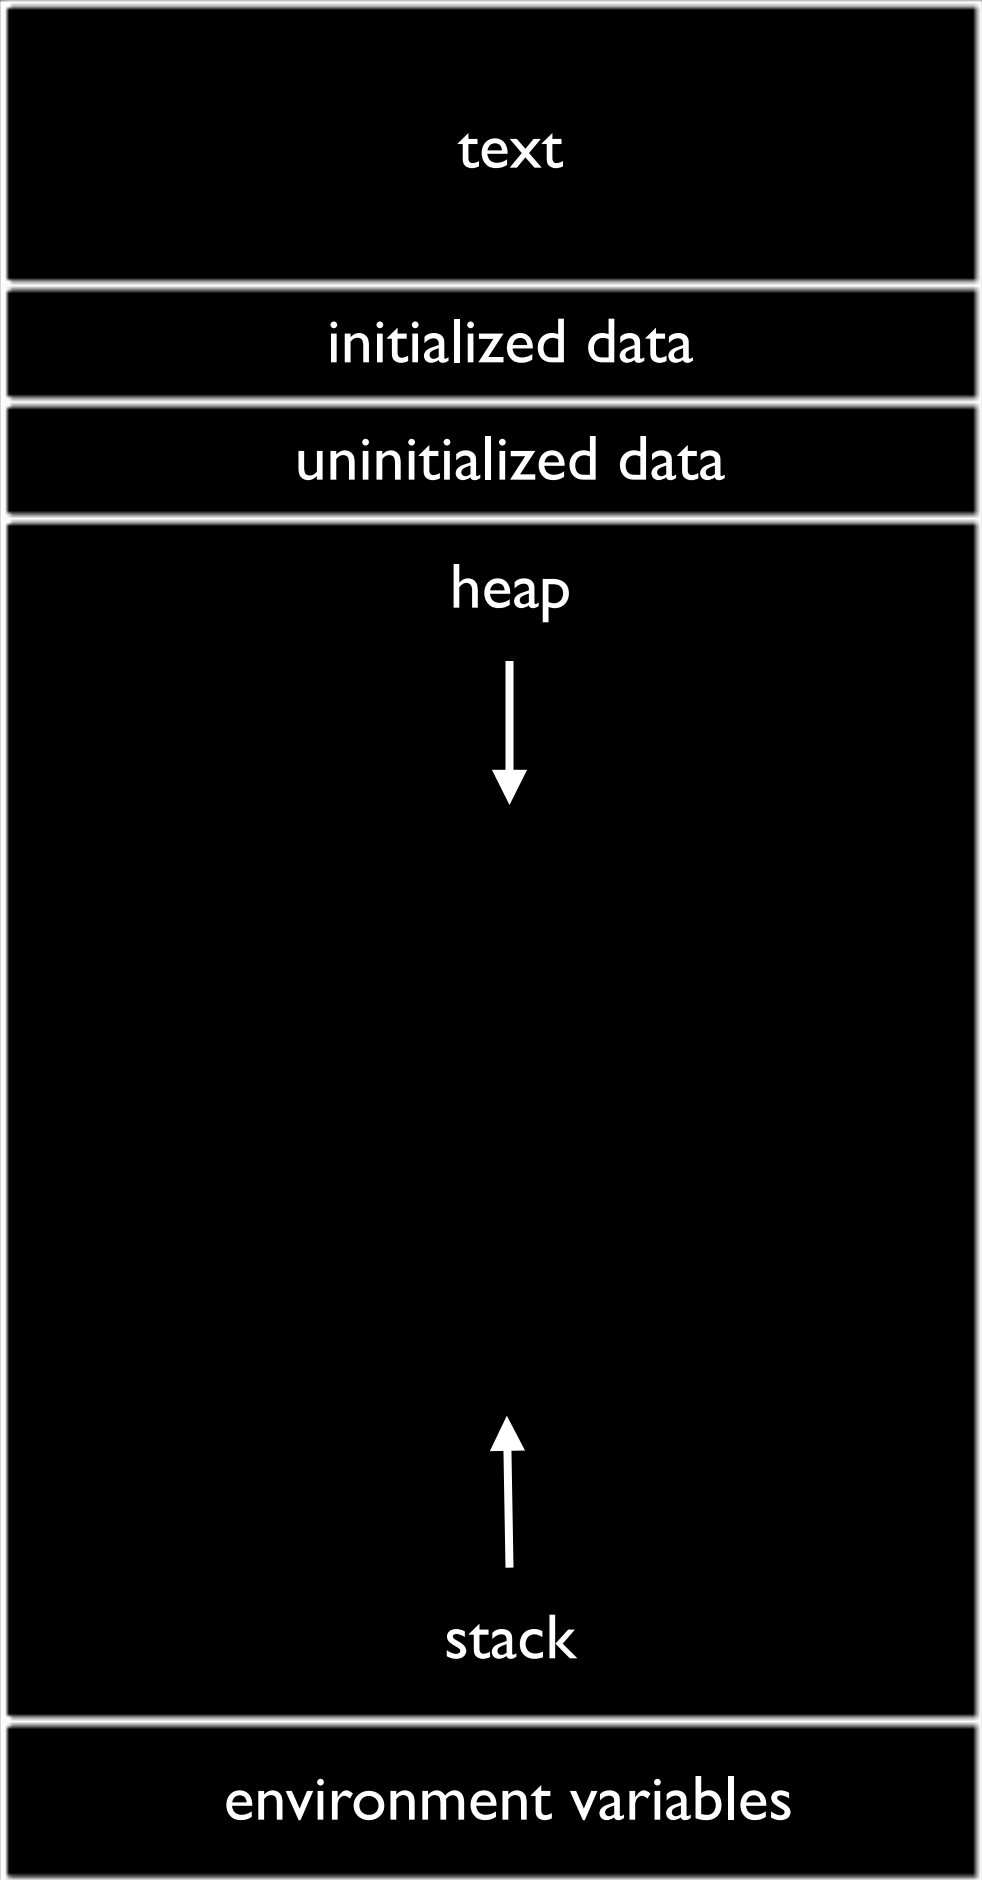

command-line arguments

```
int main(int argc, char *argv[])
```


arrays

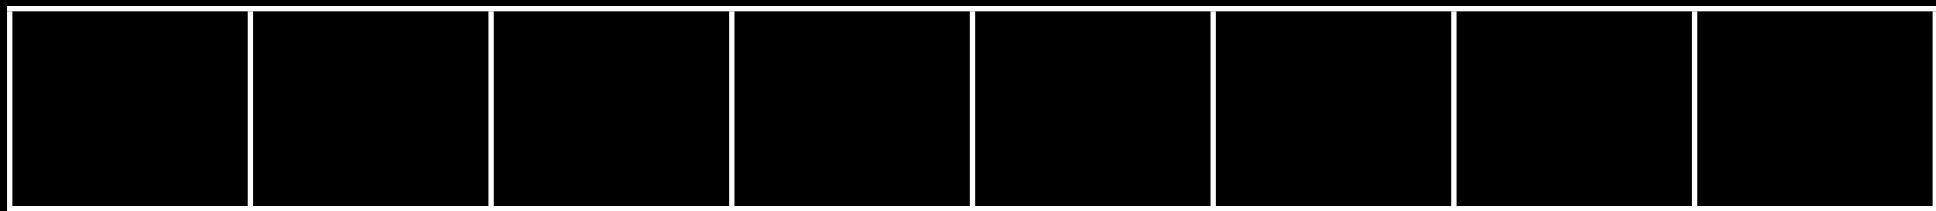

or fher gb qevax lbhe binygvar



secret-key crypto

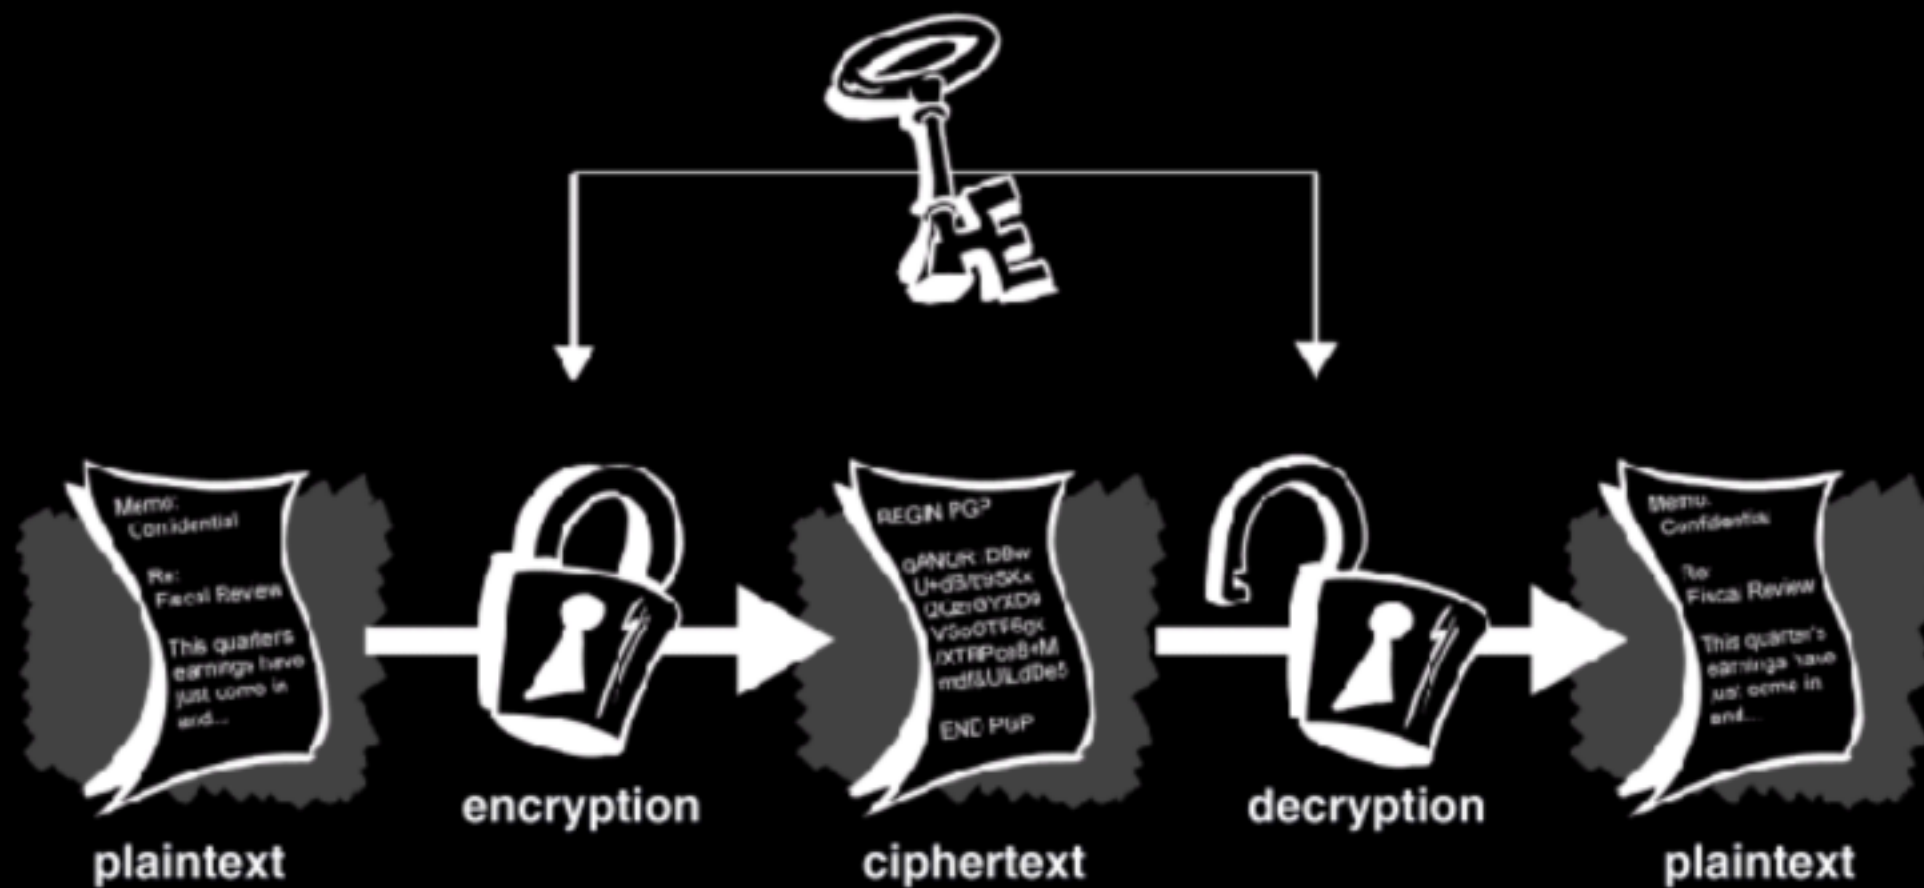

to be continued...